


Wilkerson Miniature Filter / Regulators



metal bowl

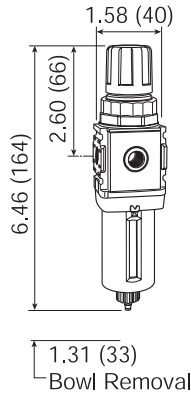

Features:

- 0-125 PSI adjusting range
- 5 micron element
- .4 oz. bowl
- self-relieving
- supplied with a 0-160 PSI flush mount style gauge
- maximum operating conditions:
 - transparent bowl: **150 PSIG** (10.3 bar) and **32°F to 125°F** (0°C to 52°C)
 - metal bowl: **250 PSIG** (17.2 bar) and **32°F to 150°F** (0°C to 65.5°C)

F


Size	Flow (SCFM)	With Transparent Bowl and Guard				With Metal Bowl			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/8"	28.6	B08-01AG	\$110.95	B08-01MG	\$101.60	B08-01AGMB	\$131.80	B08-01MGMB	\$122.50
1/4"	42.1	B08-02AG	110.95	B08-02MG	101.60	B08-02AGMB	131.80	B08-02MGMB	122.50

See pages 234-235 for filter/regulator accessories.

Wilkerson Miniature Lubricators



transparent bowl




Features:

- 1 oz. bowl
- adjustable oil feed
- full view sight dome
- *Do not fill under pressure. Air supply must be turned off and pressure bled from unit prior to adding oil.*
- maximum operating conditions:
 - transparent bowl: **150 PSIG** (10.3 bar) and **32°F to 125°F** (0°C to 52°C)
 - metal bowl: **250 PSIG** (17.2 bar) and **32°F to 175°F** (0°C to 80°C)

Size	Flow (SCFM)	With Transparent Bowl		With Metal Bowl	
		Part #	Price/E	Part #	Price/E
1/8"	20	L03-01A	\$74.20	L03-01AMB	\$81.90
1/4"	20	L03-02A	74.20	L03-02AMB	81.90



metal bowl



Features:

- .6 oz. bowl
- adjustable oil feed
- full view sight dome
- fill under pressure design
- maximum operating conditions:
 - transparent bowl: **150 PSIG** (10.3 bar) and **32°F to 125°F** (0°C to 52°C)
 - metal bowl: **250 PSIG** (17.2 bar) and **32°F to 150°F** (0°C to 65.5°C)

Size	Flow (SCFM)	With Transparent Bowl		With Metal Bowl	
		Part #	Price/E	Part #	Price/E
1/8"	23.5	L08-01A	\$72.25	L08-01AMB	\$79.90
1/4"	57.5	L08-02A	72.25	L08-02AMB	79.90

See pages 232-234 for lubricator accessories. See page 149 for air tool lubricant.



FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 150 PSIG inlet pressure.