


3-Way Brass Diverting Lead Free Ball Valves – T Flow

Female NPT x Female NPT x Female NPT

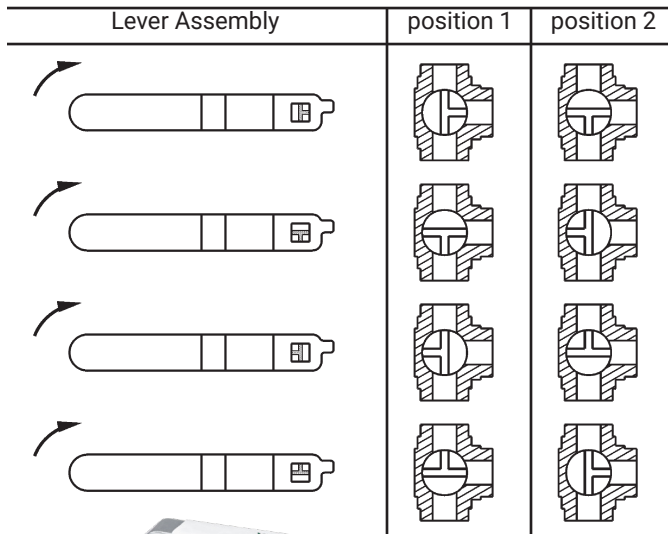

Features

- Blow-out proof stem
- Adjustable stem packing

Specifications

- Maximum temperature: **366°F (186°C)**
- Pressure rating: **400 PSI WOG; 100 PSI saturated steam**

Materials

- Chrome plated brass ball
- PTFE seats, seals, and thrust washer

Size	Port	Brass Part #
1/2"	standard	LFV50DTW
3/4"		LFV75DTW
1"		LFV100DTW
1-1/4"		LFV125DTW
1-1/2"		LFV050DTW
2"		LFV200DTW

NOTE: 1/4 turn handle can be adjusted to any orientation. Notches on the valve stem reflect the three openings on the ball.



LFV50DTW



LFV200DTW



WARNING: Misuse of this product can cause serious injury or even death.


WARNING: Pressurized steam is an extremely dangerous commodity. Only hose, fittings, clamps, and accessory items that have been approved by Dixon for use with Dixon products for steam service should ever be used. Never use an unapproved item for steam service. Always follow the manufacturer's product recommendations for pressurized steam handling.



WARNING: For safety reasons, due to differences in dimensions and tolerances, do not interchange other manufacturer's products with Dixon products.

3-Way Diverting Ball Valves – L Flow

Female NPT x Female NPT x Female NPT

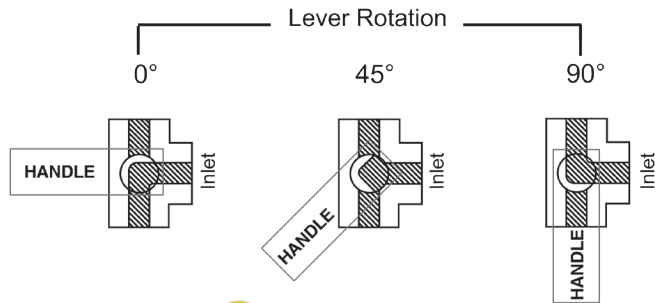

Features

- Can be used with gasoline and diesel fuel
- Blow-out proof stem
- Adjustable packing gland

Materials

- Chromium-plated ball
- RPTFE seats and stuffing box ring
- Stainless steel handle and nut with vinyl sleeve

Specification

- Pressure rating: **400 PSI CWP**

Size	Port	Bronze Part #
1/2"	full	BBV50TW ¹
3/4"	standard	BBV75TW
1"		BBV100TW

¹ Carbon steel handle and nut with vinyl sleeve

Features

- Blow-out proof stem
- Adjustable packing gland
- Locking handle

Materials

- Stainless steel ball
- RPTFE seats and stuffing box ring
- Stainless steel handle and nut with vinyl sleeve

Specification

- Rated to **800 PSI CWP**

Approval

- Meets NACE MR0175

Size	Port	Stainless Steel Part #
1/2"	full	SSBV50TW
3/4"	standard	SSBV75TW
1"		SSBV100TW

