



- > High flow regulator, 3/4" to 1-1/2" ports
- > Accurate and quick response to changes in flow demand and line pressure variations
- > Balanced valve minimizes effect of changes in inlet pressure on outlet pressure
- > Screw-on bowl reduces maintenance time
- > Protects air operated devices by removing liquid and solid contaminants



Technical data

Fluid:

Compressed air, neutral gases

NOTE: Contact technical support for use with other media.

Maximum pressure:

250 psig (17 bar)

Operating temperature*

-30° to 175°F (-34° to 80°C)

*Air supply must be dry enough to avoid ice formation at temperatures below 35°F (2°C)

Air quality:

Within ISO 8573-1, Class 6 and Class 7 (particulates)

Nominal bowl size:

1 quart (1 liter)

1 pint (0.5 liter)

Manual drain connection:

1/8-27 and 1/8-28 female pipe thread.

Automatic drain connection:

1/8-27 and 1/8-28 male

pipe thread

Flexible tube with 3/16" (5 mm)

minimum I.D. can be connected

to the automatic drain. Drain may

fail to operate if the tube I.D. is

less than 3/16" (5 mm). Avoid

restrictions in the tube.

Automatic drain operating conditions (float operated):

Bowl pressure required to close drain: Greater than 5 psig (0.3 bar)

Bowl pressure required to open

drain: Less than 3 psig (0.2 bar)

Minimum air flow required to

close drain: 2 scfm (1 dm³/s)

Manual operation: Depress pin

inside drain outlet to drain bowl.

Filter element, Quart Bowl:

Sintered bronze: 5 µm

Sintered bronze: 40 µm

Filter element, Pint Bowl:

5 µm Polypropylene

40 µm Polypropylene

Gauge ports:

1/4" PTF with PTF main ports

R1/4" with ISO G, and BSPP

main ports

Materials:

Body: aluminum

Bowl: aluminum



Bowl sight glass: Pyrex

Elastomers: chloroprene, nitrile

Bonnet: aluminum

Valve: aluminum

Ordering information

ISO Symbols	Port Size	Model Numbers	Flow scfm (dm ³ /s)*	Weight lbs (kg)
 Auto Drain	3/4"	B17-696-A3LA	500 (235)	5.6 (2.50)
 Manual Drain Relieving	1"	B17-896-A3LA	650 (306)	5.5 (2.49)
	1-1/4"	B17-A96-A3LA	680 (320)	5.8 (2.63)
	1-1/2"	B17-B96-A3LA	680 (320)	5.6 (2.50)

Alternative Models

Adjustment		Threads		Substitute	
A17	T-handle	PTF		A	
B17	Knob	ISO G		G	
		1-1/2" BSPP		C	
Port Size		Pressure Range		Substitute	
3/4"	6	5 to 125 psig (0.3 to 8.5 bar)		L	
1"	8	10 to 250 psig (0.7 to 17 bar) *		S	
1-1/4"	A				
1-1/2"	B				
Options (all remaining)		Element		Substitute	
Metal bowl with sight glass, gauge	96	5 micron		1	
Metal bowl with sight glass, no gauge	97	40 micron		3	
		Drain		Substitute	
		Automatic, 1 quart (1 liter)		A	
		Manual, 1 quart (1 liter)		M	
		Automatic, 1 pint (0.5 liter)		F	
		Manual, 1 pint (0.5 liter)		B	

Product Alternative: 68

* t-handle (A17) adjustment only

Accessories

Port size	Wall mounting bracket
3/4"	6212-50
1"	6212-50
1 1/4"	6212-51
1 1/2"	6212-51

Tamper evident cover and seal wire	Service Kit Relieving	Concentric reducing adaptors for gauge ports	Replacement elements	Replacement elements Filter element short (Standard)	Replacement drain
					
4355-51	5579-01	R1/4-G1/8 150232818	5 µm: 5311-01 40 µm: 5311-03	5 µm: 5511-01 40 µm: 5576-03	Automatic: 3000-70 Manual (1/4 turn): 619-50

Gauge

Center back connection, white face					
					
Pressure range					
bar *1	Mpa	psi	Ø	Thread size	Model
0 to 4	0 to 0.4	0 to 58	50 mm	R1/8 *2)	18-015-011
0 to 10	0 to 1	0 to 145	50 mm	R1/8 *2)	18-015-013
0 to 25	0 to 2.5	0 to 362	50 mm	R1/8 *2)	18-015-014

*1) Primary scale

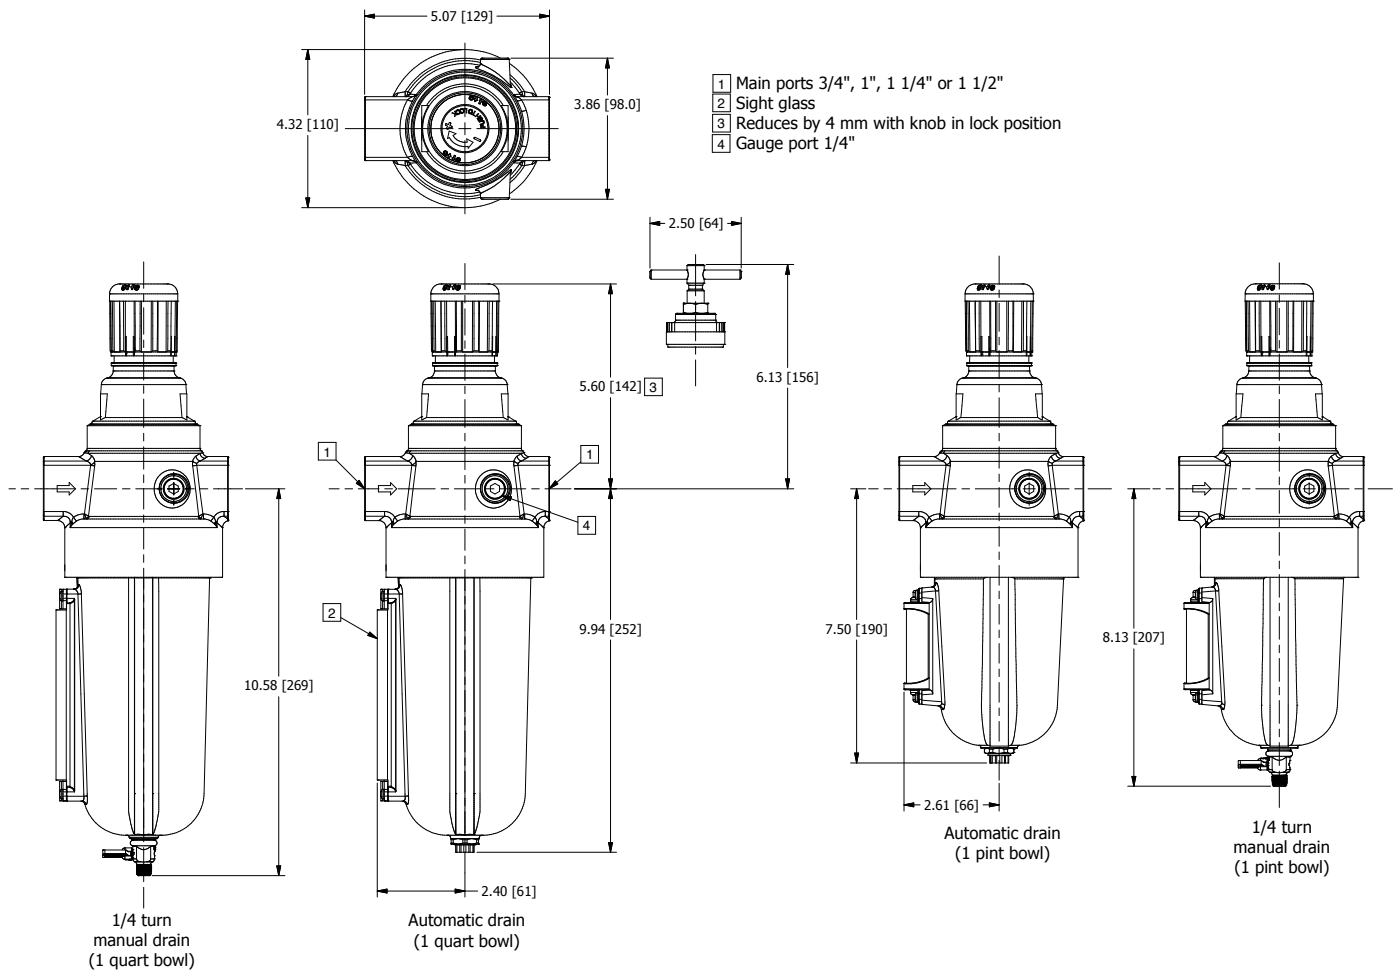
*2) Concentric reducing adapter for gauge ports Model 150232818 (R1/4-G1/8)

Gauge

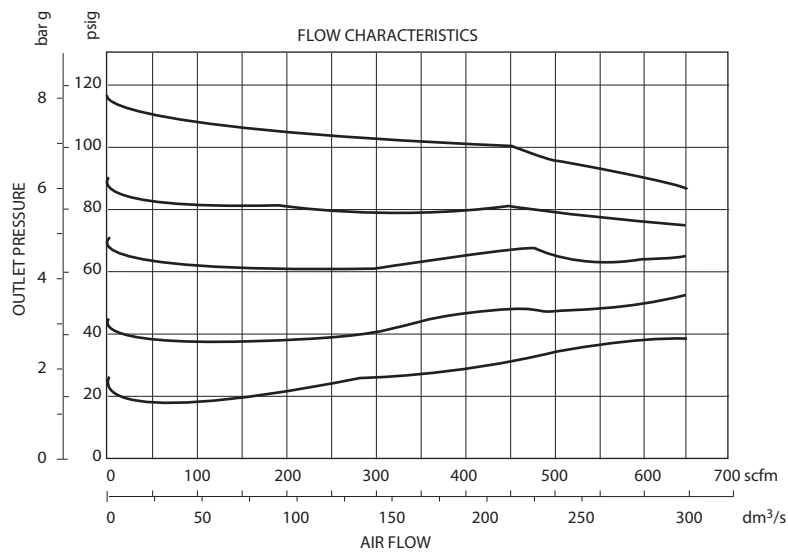
Center back connection, black face					
					
Pressure range					
psig *1	bar	Mpa	Ø	Thread size	Model
0 to 60	0 to 0.4	0 to 0.4	2" 50 mm	1/4 NPT	18-015-206
0 to 160	0 to 11	0 to 1.1	2" 50 mm	1/4 NPT	18-015-209
0 to 300	0 to 20	0 to 2.1	2" 50 mm	1/4 NPT	18-015-210

*1) Primary scale

Bowl Dimensions
Dimensions

 Dimensions in inches (mm)
 Projection/First angle


Typical Performance Characteristics



Warning

Improper selection, misuse, age or malfunction of components used in systems can cause failure in various modes. The system designer is warned to consider the failure modes of all component parts and to provide adequate safeguards to prevent personal injury or damage to equipment or property in the event of such failure modes. System designers and end users are cautioned to consult instruction sheets and specifications available from the factory. The system designer/end user is responsible for verifying that all requirements for the application are met.

Warranty

The products described herein are warranted subject to seller's Standard Terms and Condition of Sale, available at seller's website.

Proposition 65: These products may contain chemicals known to the state of California to cause cancer, or birth defects, or other reproductive harm.