

Bumpered Brass Fog Nozzles





- Straight stream, capable of greater than 100° spray angle
- Twist shut-off and flow-type change

- FM Approved for class A and B fires
- UL certified for class A and B fires

- Maximum working pressure: **100 PSI**;
maximum rated pressure: **175 PSI**

Size	Thread	Rated Flow at Rated Pressure (GPM)	Rated Flow at Wide Open: GPM @ 100 PSI	Approvals			Brass Part #
				FM	UL	ULC	
3/4"	GHT	51	51	✓	✓	✓	BBN75GHT
	NPSH			✓	✓	✓	BBN75
1"	NPSH	54	54	✓	✓	✓	BBN100
	NST			✓	✓	✓	BBN100NST

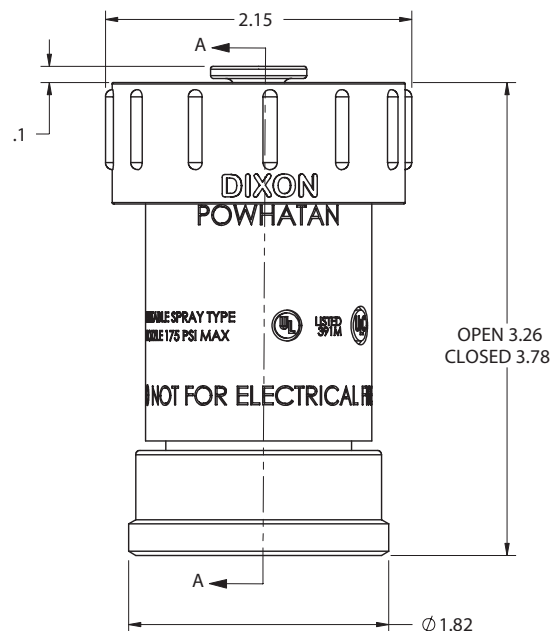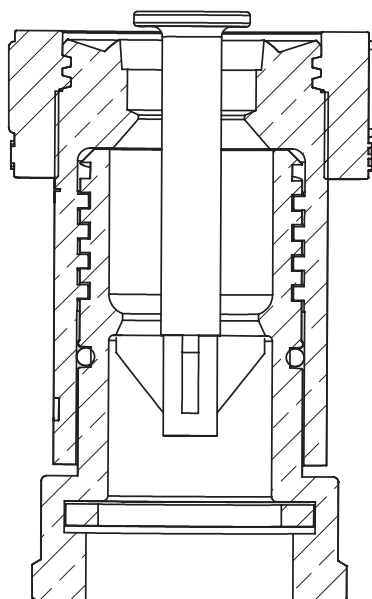

NOTE: All dimensions are shown in inches.

325 Arbor Ct
Winchester, VA 22602
ph: 877.963.4966
fx: 800.283.4966
dixonvalve.com

This information is only a general guideline. The company reserves the right to change any portion of this information without notice. Terms and conditions of sale apply and are available on request.