



Customer Service
877.963.4966

Below are a few of the many configurations available. If you don't see one that meets your requirements then "Build It Your Way". On pages 4-6 we show some of the assembly components. Pick the parts for your specific application and you can either assemble it, or we can put it together for you. Call Dixon for help in the design of an assembly that will meet your needs.


Railcar Unloading Assemblies – Build It Your Way

Application

- Easy connect / disconnect solutions for loading and unloading crude oil from rail cars.


Features

- Productivity - multiple designs available to achieve efficient and safe unloading
- Flexibility - various product options meet challenges requiring customized assemblies
- Reliability - dry disconnect valves that will not open unless connections are properly mated

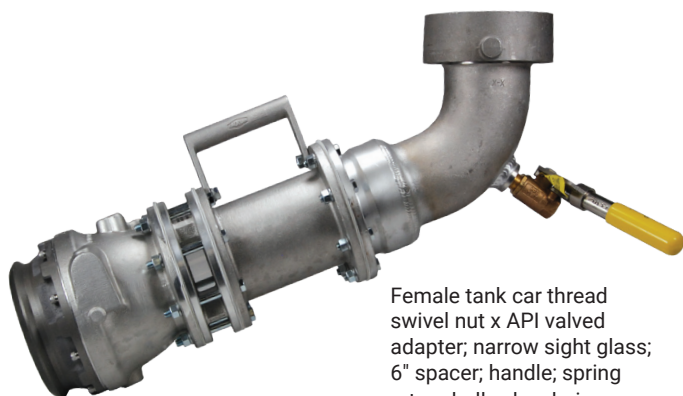


Female tank car thread swivel nut x API valved adapter; narrow sight glass; 6" spacer; handle; spring return ball valve drain

TF020001H20API

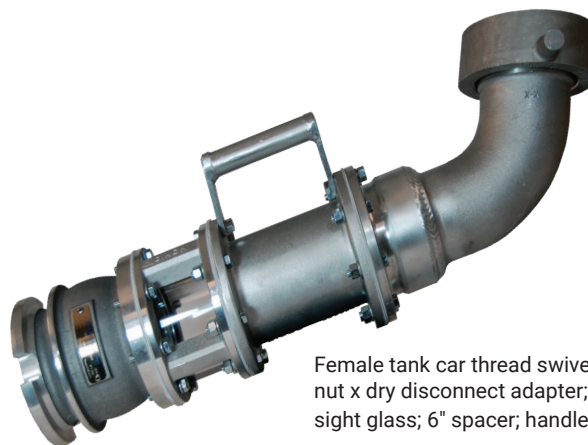


Female tank car thread swivel nut x dry disconnect adapter; sight glass; 6" spacer; handle

TF010001H10DDA

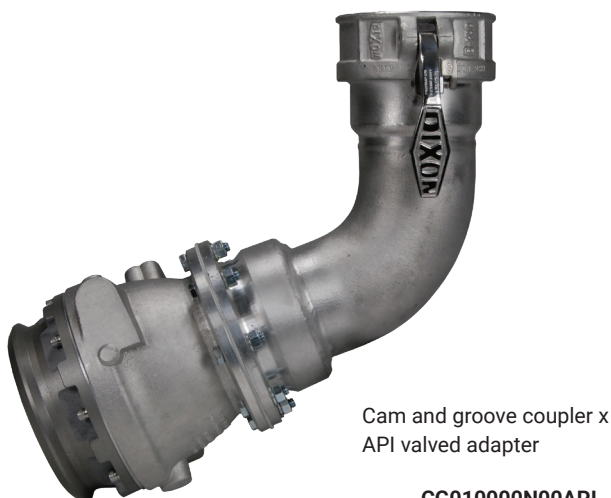


Cam and groove coupler x API valved adapter

CG010000N00API

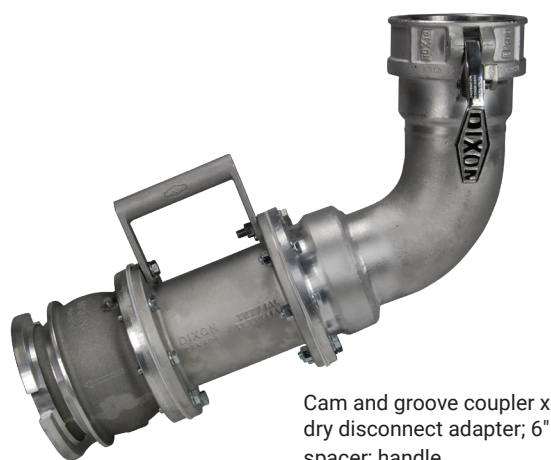


Cam and groove coupler x dry disconnect adapter; 6" spacer; handle

CG01001H00DDA

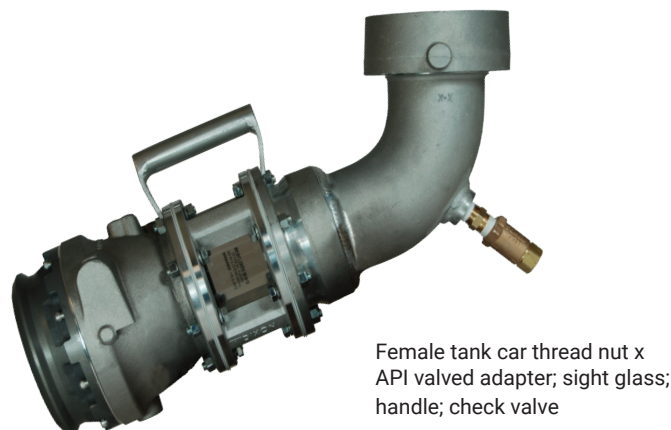

Female tank car thread nut x API valved adapter; sight glass; handle; check valve

ATC40FPSGHAPICV

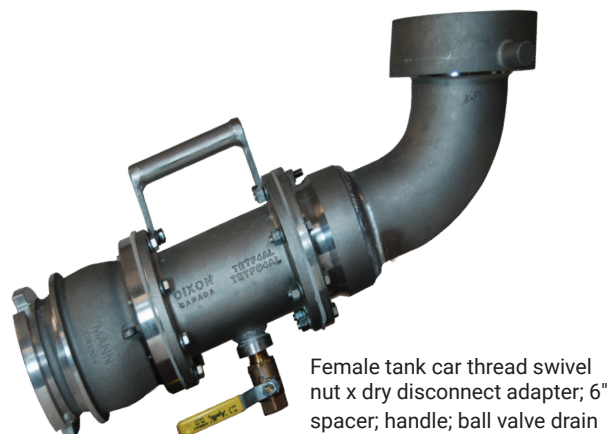

Female tank car thread swivel nut x dry disconnect adapter; 6" spacer; handle; ball valve drain

TF010003H00DDA

Transfer Hose Connection Examples

Transfer Hose with API Coupler



Transfer Hoses with Dry Disconnect Couplers



¹ Ferrule part numbers shown are for placement purposes only, the actual part number depends on the hose O.D.
NOTE: Other TTMA flange adapter configurations are available, contact Dixon® for additional information.

Railcar Unloading Components

Mates to a Tank Car



110° elbow with tank car threaded swivel
nut x
TTMA flange
ATCF40



90° elbow with cam and groove x TTMA
flange
ATCGF40-90



110° elbow with tank car threaded swivel
nut x
TTMA flange with 1/2" FNPT port
ATCF40FP50



110° elbow with cam and groove x TTMA
flange
ATCGF40



Female tank car thread x cam and groove
adapter
400-TCA-AL



Dixon cam & groove coupler x male tank
car thread
400DWX5TC



EZ Boss-Lock cam & groove coupler x
male tank car thread
AD400ALEZMTC

Spacer with Port



TTMA Spacer with 1/2" FNPT port
TTFS4AL-FP50

1/2 Female NPT Port Options



Ball Valve
BMV50



Spring Return Ball Valve
BBV50SR¹



Check Valve
61-103¹

Flange Extension



TTMA Flange, 6" extension
TETF4AL



TTMA Flange, 6" Extension with 1/2" FNPT Port
TETF4ALFP50

Handle Option



HANDLE

¹ Ball and check valves are also available in stainless steel

Railcar Unloading Components

TTMA Flanged Sight Glasses



Sight glass (3-1/4" wide)
5201-SFI



Narrow sight glass (1-3/4" wide)
5200-SFI




Acrylic sight glass (1-3/4" wide)
TT4ASG



Acrylic ethanol sight glass (1-3/4" wide)
TT4ASG-ETH

TTMA Flange Screen / Gasket



Screen with 1" square holes
TTFS4SS



PTFE envelope gasket with Baylast™ core
40322TF

Dry Disconnect Adapter



Dry disconnect adapter x TTMA flange
DDA400AL164TTMA

API Adapters



API adapter
(poppet opens with API coupler
engagement only)
5204LSNG



API adapter with fixed handle
(poppet can open with API coupler
engagement
or by using the handle)
5204NG

Cam and Groove Adapter




Cam & groove adapter x TTMA flange
400-ALT-AL

Accessories

Caps



DDDC400



5354P1

Part #	Description
DDDC400	Dry disconnect dust cap
5000-25	Nylon API dust cap / chain



Plugs



DDDP400

Part #	Description
5MTCP	Threaded plug for tank car nut
5354P1	API coupler plug
DDDP400	Dry disconnect dust plug



5MTCP

Parking Adapters

Part #	Description
TOOL504-1	Dry disconnect parking adapter
5204H	API parking adapter
5204H-SPEC	Low profile hanger for rack coupler, unassembled



TOOL504-1



5204H



5204H-SPEC

Hardware Kits

Features

- For use on one assembly end only
- Kits include: 8 each nuts, lock washers and bolts

Part #	Description
TCABK-1.5	Replacement bolt kit, 1-1/2" bolt length
TCABK-3	Replacement bolt kit, 3" bolt length
TCABK-3.5	Replacement bolt kit, 3-1/2" bolt length



TCABK-1.5

Spanner Wrench


Part #	Description
G10	Iron, used on aluminum and iron railcar nuts



Steam Hose Connections GJ Boss® Ground Joint Seal

Sizes

- 3/4", 1", 1-1/2", 2"

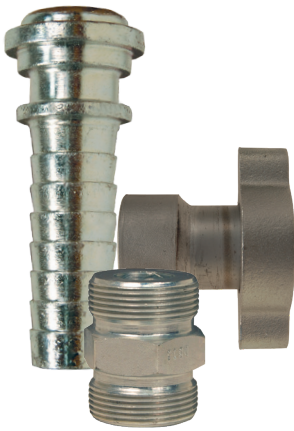

Features

- Easy, positive metal-to-polymer seal
- Leakproof seal forms when the metal head of the stem makes contact with the patented polymer seat in the spud
- Non-metallic polymer seat resists most chemicals found in manufacturing facilities; visit dixonvalve.com for corrosion resistance information
- Works with existing fittings
- Configurations: stem, nuts, spuds

Materials

- Plated steel and / or iron

Specifications

- Recommended for steam service up to 450°F (232°C)

Warning: Do Not Disconnect Under Pressure!



Steam Quick Disconnect Couplings

Application

- Designed exclusively for steam applications

Sizes

- 3/4", 1", 1-1/2"



Features

- Coupler sleeve designed for easier gripping with gloves
- Two ethylene propylene O-rings in the coupler and one ethylene propylene O-ring in the plug provide double protection against leaks
- Configurations: poppet valve couplers and plugs

Materials

- Coupler and plug are solid brass with stainless steel springs and locking balls
- Coupler has a plated steel sleeve

Specifications

- Rated to 200 PSI gauge saturated steam 388°F (198°C)

Warning: Do Not Disconnect Under Pressure!



Dry Disconnect Fittings for Steam Service

Application

- Designed for steam hoses used for heating viscous products in tank car applications.

Sizes

- 1-1/2", 2"

Features:

- Eliminates unintentional separation preventing accidents and avoiding unintended down time
- Performance unaffected by surface rust
- Lockable versions are available, contact Dixon for information
- Configurations: coupler x female NPT, adapter x female NPT

Materials

- Coupling house and all inner parts: stainless steel
- EPDM seals standard, other materials available contact Dixon for information

Specifications

- Maximum operating: 150 PSI
- Maximum temperature rating: 350°F (177°C)

Note: Can be safely disconnected while in service.



Limited Warranty

DIXON VALVE AND COUPLING COMPANY, LLC (herein called "Dixon") warrants the products described herein and manufactured by Dixon to be free from defects in material and workmanship for a period of one (1) year from date of shipment by Dixon under normal use and service. Its sole obligation under this warranty being limited to repairing or replacing, as hereinafter provided, at its option any product found to Dixon's satisfaction to be defective upon examination by it, provided that such product shall be returned for inspection to Dixon's factory within three (3) months after discovery of the defect. The repair or replacement of defective products will be made without charge for parts or labor. This warranty shall not apply to: (a) parts or products not manufactured by Dixon, the warranty of such items being limited to the actual warranty extended to Dixon by its supplier; (b) any product that has been subject to abuse, negligence, accident, or misapplication; (c) any product altered or repaired by others than Dixon; and (d) to normal maintenance services and the replacement of service items (such as washers, gaskets, and lubricants) made in connection with such services. To the extent permitted by law, this limited warranty shall extend only to the buyer and any other person reasonably expected to use or consume the goods who is injured in person by any breach of the warranty. No action may be brought against Dixon for an alleged breach of warranty unless such action is instituted within one (1) year from the date the cause of action accrues. This limited warranty shall be construed and enforced to the fullest extent allowable by applicable law.

Other than the obligation of Dixon set forth herein, Dixon disclaims all warranties, express or implied, including but not limited to any implied warranties of merchantability or fitness for a particular purpose, and any other obligation or liability. The foregoing constitutes Dixon's sole obligation with respect to damages, whether direct, incidental, or consequential, resulting from the use or performance of the product.

Some products and sizes may be discontinued when stock is depleted or may require a minimum quantity for ordering.

Limits of Liability

This catalog is intended as a product offering. It is not intended to be a user or technical manual. Information in this catalog is subject to change without notice. All users and distributors of products sold through this catalog should contact Dixon with questions of use, compatibilities, coupling procedures, and life of product. Our full-time engineering and test staff are always available to recommend uses and to assist distributors and users with any questions.

Safety

Safety logos, which appear throughout our catalog, are used as a reminder that the user should carefully review for the appropriateness of the product for the media, application, and environment in which it will be used.

NOTE: Because of the health hazards associated with contamination and lead content in drinking water systems, Dixon couplings, unless otherwise specifically approved, are not recommended for potable water service and should not be used in applications where drinking water will contact the wetted surfaces of the coupling.



WARNING: Dixon products may contain chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm.

Trademark

Kamvalok® is a registered trademark of OPW Engineered Systems.

Copyright

Copyright © 2025 by Dixon Valve and Coupling Company, LLC

All rights reserved. This book is copyrighted material. Use, reproduction or copying of it by anyone other than Dixon® is strictly forbidden without its express written consent.

NOTE: Reasonable care has been taken in preparing this catalog. Dixon Valve & Coupling Company, LLC reserves the right to make corrections.



1 Dixon Square
Chestertown, MD 21620
Phone: 877.963.4966
Email: sales@dixonvalve.com

connect with us on



© 2025 DVCC

Printed in the USA

RAILCARASSEMBLIES_525

[illegible]